

# Ceramic High Pass Filter

## HFCG-1500+

50Ω      1600 to 6000 MHz

### The Big Deal

- Small size 2.0 mm x 1.25 mm
- Very good Power handling
- Ceramic construction



*Generic photo used for illustration purposes only*  
CASE STYLE: GE0805C-9

### Product Overview

HFCG-1500+ is a high pass filter with passband from 1600 MHz to 6000 MHz supporting a variety of applications. This model provides 2 dB typical insertion loss over a wide band due to strategically constructed layout. Housed in a tiny 0805 ceramic form factor with wraparound terminations, the filter is ideal for dense PCB layouts with minimal performance variation due to parasitics.

### Key Features

| Feature                      | Advantages  |
|------------------------------|---|
| Small size, 2.0 mm x 1.25 mm | Accommodates tight space requirements for dense PCB layouts.  |
| Wrap around termination      | Provides excellent solderability and easy visual inspection capability.   |
| LTCC construction            | Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes. |
| Wide pass band               | This filter has a wide passband from 1.6 GHz to 6 GHz.  |

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Ceramic High Pass Filter

50Ω 1600 to 6000 MHz

## HFCG-1500+



Generic photo used for illustration purposes only  
CASE STYLE: GE0805C-9

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Features

- Small size
- Temperature stable
- LTCC construction
- Very good power handling, 2.5W

### Applications

- Transmitters / Receivers
- Test and measurements
- Military applications
- Telecommunications and broadband wireless systems

### Electrical Specifications<sup>(1,2)</sup> at 25°C


| Parameter |                | F#    | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|-----------|----------------|-------|-----------------|------|------|------|------|
| Stop Band | Rejection Loss | DC-F1 | DC - 800        | 30   | 40   | -    | dB   |
|           |                | F1-F2 | 800 - 1000      | 28   | 35   | -    | dB   |
|           | Freq. Cut-Off  | F3 *  | 1400            | -    | 3.0  | -    | dB   |
| Pass Band | Insertion Loss | F4-F5 | 1600 - 1900     | -    | 2.0  | -    | dB   |
|           |                | F5-F6 | 1900 - 5000     | -    | 1.0  | 1.7  | dB   |
|           | Return Loss    | F6-F7 | 5000 - 6000     | -    | 2.0  | -    | dB   |
|           |                | F4-F7 | 1600 - 6000     | -    | 10   | -    | dB   |

1 This component is not intended to act as a DC block. Please consult with Mini-Circuits for further details

2 Measured on Mini-Circuits Characterization Test Board TB-1104+

\* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

### Functional Schematic

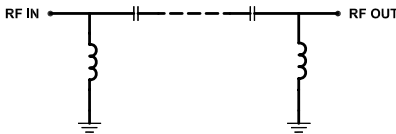

### Maximum Ratings

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -55°C to 125°C |
| Storage Temperature   | -55°C to 125°C |
| RF Power Input*       | 2.5W at 25°C   |





\*Passband rating, derate linearly to 0.5W at 125°C ambient

Permanent damage may occur if any of these limits are exceeded.

### Typical Performance Data at 25°C

| Frequency (MHz) | Insertion Loss (dB) | Return Loss (dB) |
|-----------------|---------------------|------------------|
| 10              | 71.90               | 0.15             |
| 100             | 54.69               | 0.17             |
| 800             | 37.88               | 0.43             |
| 1000            | 39.09               | 0.68             |
| 1120            | 31.27               | 1.11             |
| 1180            | 21.33               | 1.63             |
| 1200            | 18.52               | 1.91             |
| 1300            | 7.51                | 5.58             |
| 1400            | 3.05                | 13.94            |
| 1500            | 1.97                | 14.97            |
| 1600            | 1.59                | 13.17            |
| 1900            | 0.98                | 13.85            |
| 2000            | 0.81                | 16.07            |
| 2500            | 0.49                | 20.52            |
| 3000            | 0.49                | 14.74            |
| 4000            | 0.27                | 24.61            |
| 5000            | 0.43                | 13.02            |
| 5500            | 0.67                | 9.89             |
| 5700            | 0.78                | 9.12             |
| 6000            | 0.90                | 8.26             |

### Typical Frequency Response

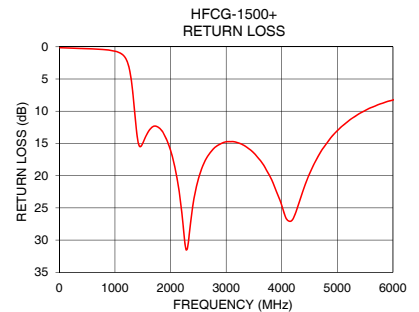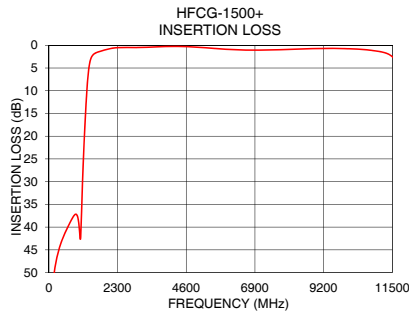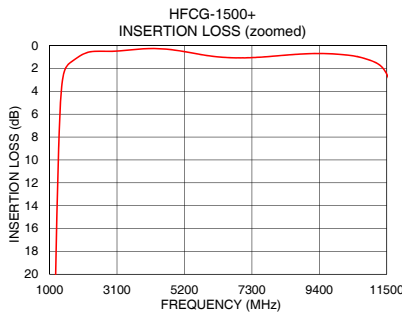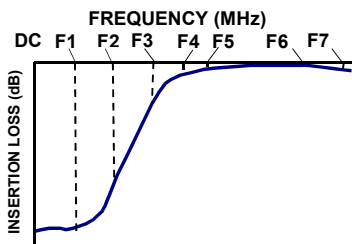

#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. B  
ECO-012606  
HFCG-1500+  
EDU3653  
URJ  
220331  
Page 2 of 3

## Pad Connections

|        |            |
|--------|------------|
| INPUT  | 1          |
| OUTPUT | 3          |
| GROUND | 2, 4, 5, 6 |

Product Marking: LZ


Demo Board MCL P/N: TB-1104+  
Suggested PCB Layout (PL-633)

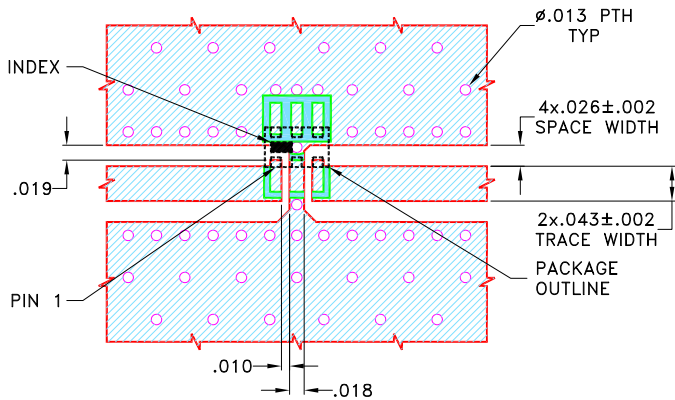

### NOTES:

- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .020±.0015. COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

## Outline Drawing

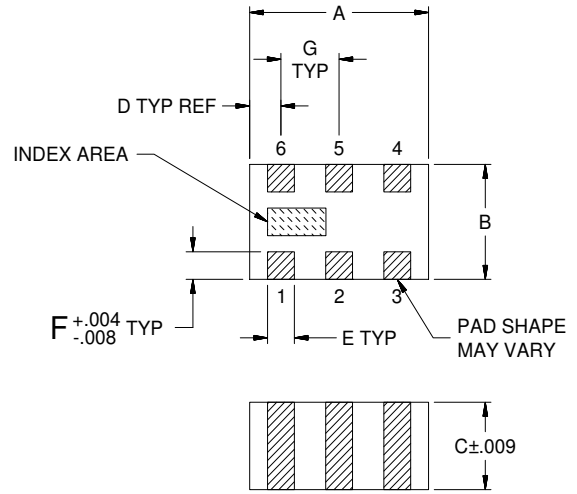

### Outline Dimensions (inch / mm)

| A    | B    | C    | D    | E    | F    | G    | Wt.   |
|------|------|------|------|------|------|------|-------|
| .079 | .049 | .037 | .014 | .012 | .012 | .026 | grams |
| 2.00 | 1.25 | 0.95 | 0.35 | 0.30 | 0.30 | 0.65 | .008  |

Note: Please refer to case style drawing for details

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)