

2N4858  
2N4858A

N-CHANNEL  
SILICON JFET



TO-18 CASE



www.centrasemi.com

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 2N4858 and 2N4858A are N-Channel silicon JFETs designed for analog switching and chopper applications.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^{\circ}\text{C}$ )

Drain-Source Voltage	
Drain-Gate Voltage	
Reverse Gate-Source Voltage	
Forward Gate Current	
Power Dissipation ( $T_A=25^{\circ}\text{C}$ )	
Operating and Storage Junction Temperature	

**SYMBOL**

$V_{DS}$	40
$V_{DG}$	40
$V_{GSR}$	40
$I_{GF}$	50
$P_D$	360
$T_J, T_{stg}$	-65 to +200

**UNITS**

V
V
V
mA
mW
$^{\circ}\text{C}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$I_{GSS}$	$V_{GS}=20\text{V}, V_{DS}=0$		0.25	nA
$I_{GSS}$	$V_{GS}=20\text{V}, V_{DS}=0, T_A=150^{\circ}\text{C}$		0.5	$\mu\text{A}$
$I_{DSS}$	$V_{DS}=15\text{V}, V_{GS}=0$	8.0	80	mA
$I_{D(OFF)}$	$V_{DS}=15\text{V}, V_{GS}=10\text{V}$		0.25	nA
$I_{D(OFF)}$	$V_{DS}=15\text{V}, V_{GS}=10\text{V}, T_A=150^{\circ}\text{C}$		0.5	$\mu\text{A}$
$BV_{GSS}$	$I_G=1.0\mu\text{A}, V_{DS}=0$	40		V
$V_{GS(OFF)}$	$V_{DS}=15\text{V}, I_D=0.5\text{nA}$	0.8	4.0	V
$V_{DS(ON)}$	$I_D=5.0\text{mA}, V_{GS}=0$		0.5	V
$r_{DS(ON)}$	$V_{GS}=0, I_D=0, f=1.0\text{kHz}$		60	$\Omega$
$C_{rss}$	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4858)		8.0	pF
$C_{rss}$	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4858A)		3.5	pF
$C_{iss}$	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4858)		18	pF
$C_{iss}$	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4858A)		10	pF
$t_d$	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858)		10	ns
$t_d$	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858A)		8.0	ns
$t_r$	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858)		10	ns
$t_r$	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858A)		8.0	ns
$t_{off}$	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858)		100	ns
$t_{off}$	$V_{DD}=10\text{V}, V_{GS(OFF)}=4.0\text{V}, I_D=5.0\text{mA}$ (2N4858A)		80	ns

R0 (19-August 2010)

2N4858  
2N4858A  
  
N-CHANNEL  
SILICON JFET



TO-18 CASE - MECHANICAL OUTLINE

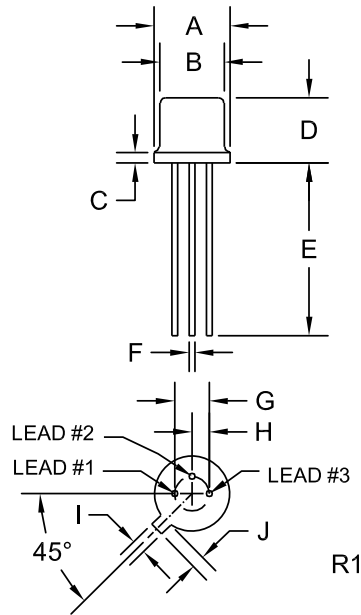

**LEAD CODE:**

- 1) Source
- 2) Drain
- 3) Gate

**MARKING: FULL PART NUMBER**

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)

R0 (19-August 2010)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)