

**ZWS50B**

SPECIFICATIONS

A243-01-01B


ITEMS		MODEL	ZWS50B -3	ZWS50B -5	ZWS50B -12	ZWS50B -15	ZWS50B -24	ZWS50B -48
1	Nominal Output Voltage	V	3.3	5	12	15	24	48
2	Maximum Output Current	A	10	10	4.3	3.5	2.1	1.1
3	Maximum Output Power	W	33.0	50.0	51.6	52.5	50.4	52.8
4	Efficiency (Typ.) (*1)	100VAC %	82	83	83	84	85	86
		200VAC %	84	86	86	87	87	88
5	Input Voltage Range (*2)	-	85 - 265VAC (47 - 63Hz) or 120 - 370VDC					
6	Input Current (Typ.) (*1)	A	0.8/0.5	1.1/0.7				
7	Inrush Current (Typ.) (*1)(*3)	-	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start					
8	Output Voltage Range	V	2.97 - 3.63	4.5 - 5.5	10.8 - 13.2	13.5 - 16.5	21.6 - 26.4	39.5 - 52.8
9	Maximum Ripple & Noise (*4)(*5)	0≤Ta≤70°C mV	120	120	150	150	150	200
		-10≤Ta<0°C mV	160	160	180	180	180	240
10	Maximum Line Regulation (*4)(*6)	mV	20	20	48	60	96	192
11	Maximum Load Regulation (*4)(*7)	mV	40	40	96	120	150	240
12	Temperature Coefficient (*4)	-	Less than 0.02% / °C					
13	Over Current Protection (*8)	A	10.5-	10.5-	4.51-	3.67-	2.20-	1.15-
14	Over Voltage Protection (*9)	V	3.79 - 4.95	5.75 - 7.0	13.8 - 16.2	17.3 - 20.3	27.6 - 32.4	55.2 - 64.8
15	Hold-up Time (Typ.) (*1)	-	15ms(Typ) at 100% Load / 20ms(Typ) at 70% Load					
16	Leakage Current (*10)	-	Less than 0.5mA. 0.2mA(Typ) at 100VAC / 0.4mA(Typ) at 230VAC					
17	Remote Control	-	-					
18	Parallel Operation	-	-					
19	Series Operation	-	Possible					
20	Operating Temperature (*11)	-	Convection : -10 - +70°C (-10 - +50°C:100%, +60°C:75%, +70°C:50%)					
21	Operating Humidity	-	30 - 90%RH (No Condensing)					
22	Storage Temperature	-	-30 - +75°C					
23	Storage Humidity	-	10 - 90%RH (No Condensing)					
24	Cooling	-	Convection Cooling					
25	Withstand Voltage	-	Input - FG : 2kVAC (10mA), Input - Output : 3kVAC (10mA) Output - FG : 500VAC (20mA) for 1min					
26	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC					
27	Vibration	-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s <sup>2</sup> Constant, X,Y,Z 1hour each.					
28	Shock	-	Less than 196.1m/s <sup>2</sup>					
29	Safety	-	Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1 (Expire date of 60950-1 : 20/12/2020), EN50178(OV II) Designed to meet DENAN at 100VAC Only.					
30	Conducted Emission	-	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
31	Radiated Emission	-	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
32	Immunity	-	Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11					
33	Weight (Typ.)	g	165					
34	Size (W x H x D)	mm	50 x 26 x 132 ( Refer to Outline Drawing )					

\*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- \*1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.
- \*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50-60Hz).
- \*3. Not applicable for inrush current to a noise filter for less than 0.2ms.
- \*4. Please refer to Fig. A for measurement of output voltage, line & load regulation and ripple voltage.
- \*5. For start up at low ambient temperature and low input voltage, output ripple noise might not meet specification. However, specification can be met after one second.
- \*6. 85 - 265VAC, constant load.
- \*7. No load-Full load, constant input voltage.
- \*8. Hiccup with automatic recovery.  
Avoid to operate at over load or short circuit condition for more than 30seconds.
- \*9. OVP circuit shut down the output, manual reset (Re power on) to get output voltage.
- \*10. Measured by the each measuring method of UL, CSA, EN and DENAN(at 60Hz), Ta=25°C.
- \*11. Output Derating
  - Derating at standard mounting. Refer to output derating curve(A243-01-02\_).
  - About a force air cooling, refer to output derating curve (A243-01-03\_).
  - Load (%) is percent of maximum output power or maximum output current, whichever is greater.

Fig. A

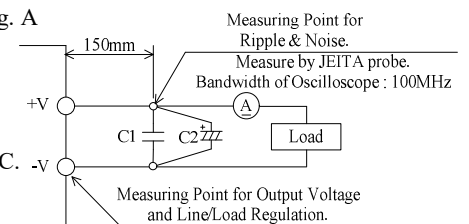

C1 : Film Cap. 0.1 μF  
C2 : Elec. Cap. 100 μF


**ZWS50B**

OUTPUT DERATING

A243-01-02


\*COOLING : CONVECTION COOLING

Ta (°C)	LOAD (%)	LOAD (%)	LOAD (%)
	MOUNTING A, B, C, E	MOUNTING D	MOUNTING F
-10 - +40	100	100	100
45	100	100	90
50	100	88	80
60	75	64	60
70	50	40	40

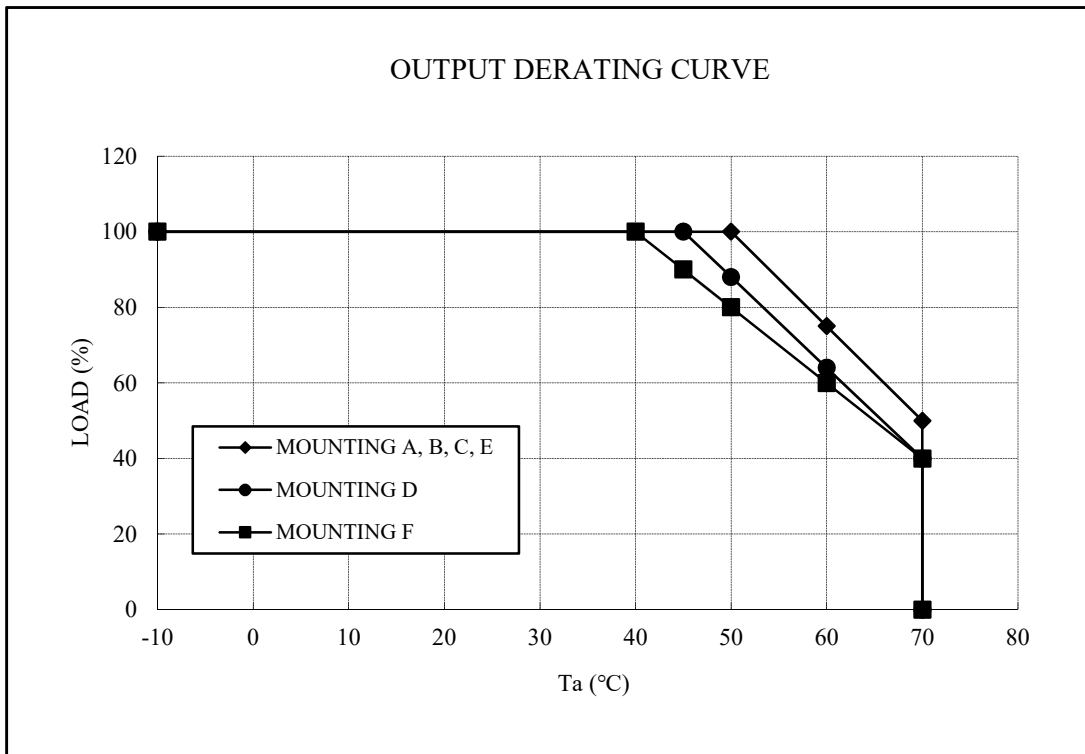

MOUNTING A    MOUNTING B    MOUNTING C    MOUNTING D    MOUNTING E    MOUNTING F

(STANDARD MOUNTING)

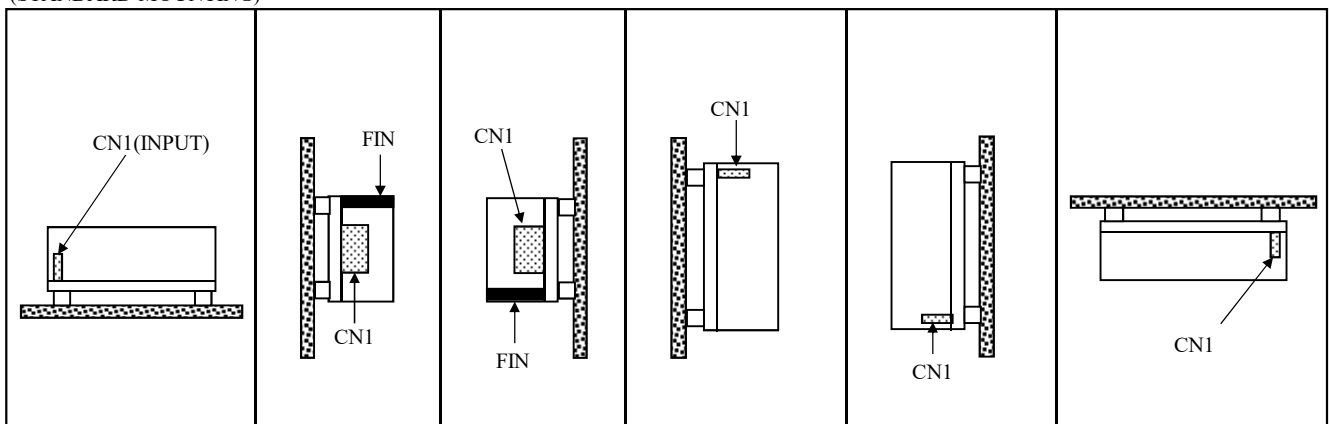

**ZWS50B**


OUTPUT DERATING

A243-01-03

\*COOLING : FORCED AIR COOLING

Ta (°C)	LOAD (%)
	MOUNTING A-F
-10 - +60	100
70	70

Air velocity  $\geq 0.7\text{m/s}$  : Air must flow through component side.

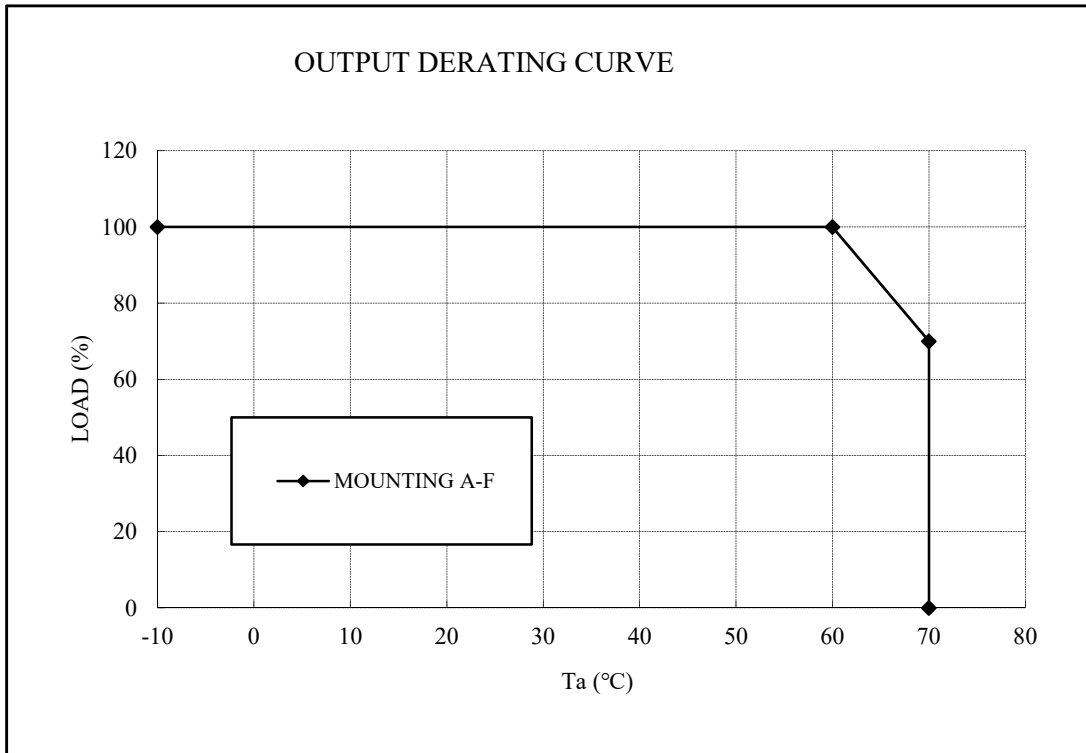

- MOUNTING A    MOUNTING B    MOUNTING C    MOUNTING D    MOUNTING E    MOUNTING F

(STANDARD MOUNTING)

